

DYNO[®]-MILL KD *Horizontal agitator bead mill*

Proven performance in the field of dispersion
and ultra fine wet grinding with
thousands of installations worldwide




WAB – your expert for wet milling and ultra fine dispersion

For many decades WAB has been the undisputed specialist in dispersion and milling technology with its world renowned **DYNO®-MILL**. The stringent requirements, which the finished product has to fulfil, also demand the highest standards of quality and abrasion resistance from the mill components.

With an extensive mill program, WAB will supply the perfect mill for both your product and your process.




DYNO®-MILL KD 120 A – with 126-litre grinding container, contact pressure gauge and thermometer

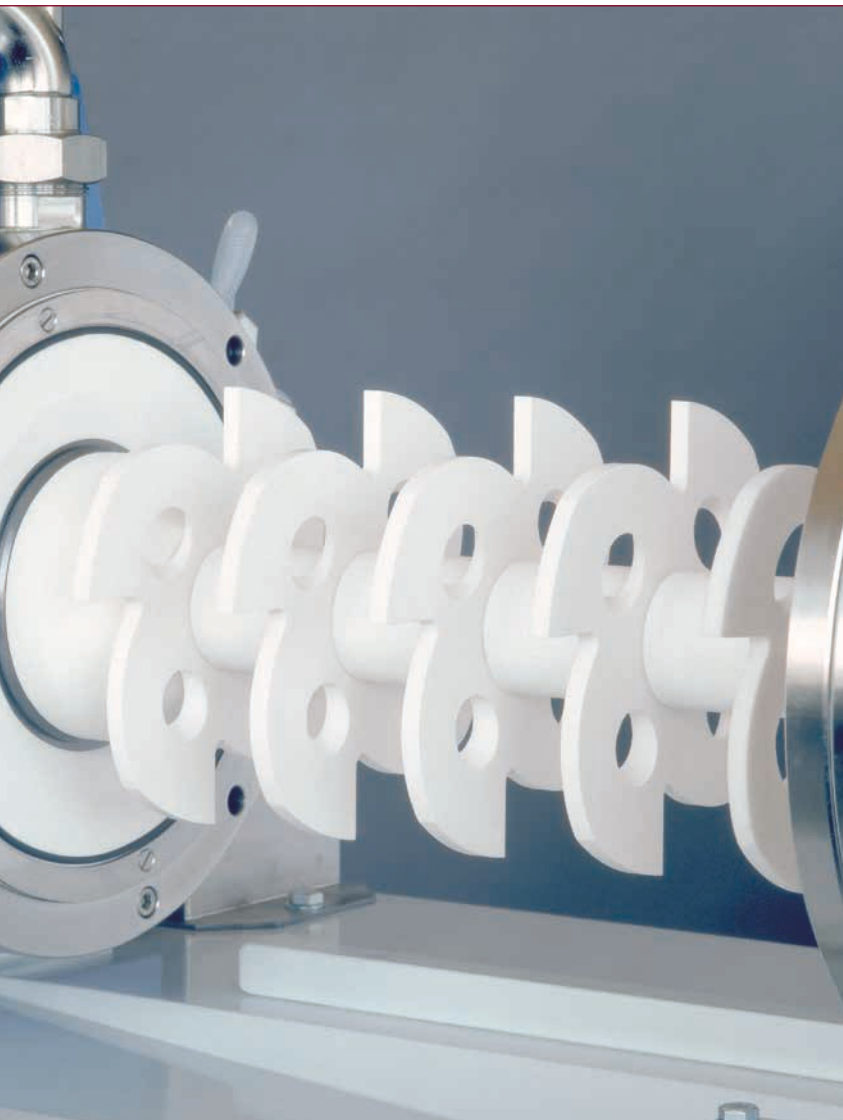

The features of the DYNO®-MILL KD

- Ideal for pass mode with consistent efficiency to obtain narrow particle size distribution in the micrometer range
- The optimum configuration for every product with an extremely wide choice of materials for components coming into contact with the product – including hardened and stainless steel, hard chrome plated stainless steel, polyurethane, ceramic
- Maximum operating safety – the basic model already complies with **CE** and ATEX (Ex II 2 G cb IIB T3)
- Grinding bead size range from 0.3–2.5 mm
- Adaptation of the grinding chamber volume to the batch size, combined with an ideal cooling process due to the flow in the cooling jacket, allows the handling of temperature-sensitive products
- Easy to use – all **DYNO®-MILL KD** types can be taken apart in just a few steps, allowing simple rapid change-over to a different mill configuration
- Simple operation and easy setting of operating parameters
- The consistent milling design enables scaling-up to any size in the **DYNO®-MILL** type **KD** series
- Low operating and maintenance costs



The reliable **DYNO®-MILL KD** production mill is used for continuous dispersion and wet grinding of pumpable products with high to low viscosities down to micron sizes.

Top performance for your product – | fully developed and proven




Grinding bead separation


On the **KD 6** to **KD 60** mills, the grinding beads are retained in the mill by means of a dynamic gap separator with rotor and stator made of tungsten carbide. The gap width is adjustable to suit the grinding bead size. The medium-sized production mills (KD 20B-60) are also available with a screen separator as an option. The **KD 120A** to **KD 600** types are fitted exclusively with an easily removable arched screen. Grinding beads of different materials and sizes (0.3–2.5 mm) can be used.

Self-cleaning dynamic gap separator

Easily accessible screen

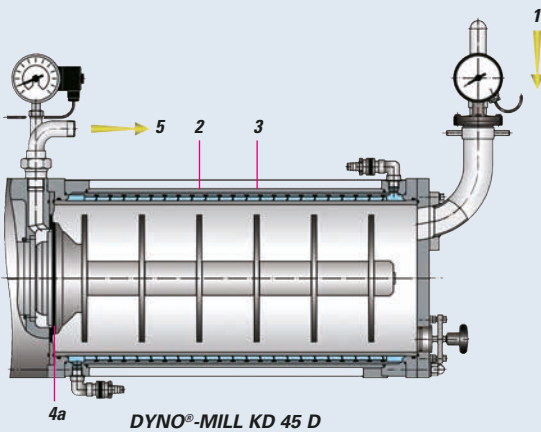

4a DYNO-MILL KD 45 D

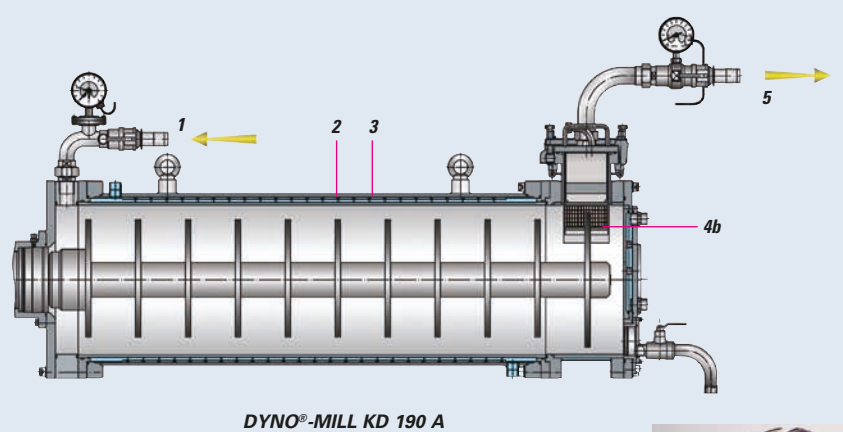

DYNO-MILL KD 190 A

Mode of operation

- 1 Product inlet
- 2 DYNO® agitator discs in a wide range of materials
- 3 Cooled grinding container with easily interchangeable grinding cylinder in hardened or stainless steel, hard chrome plated stainless steel, polyurethane, ceramic
- 4a Dynamic gap separator
- 4b Screen separator
- 5 Product outlet



Agitator discs

Shaft seal

The shaft sealing is achieved by means of a single or double mechanical seal developed by WAB. The compact design of this seal enables quick and easy replacement. The shaft seal is pressurized with a product-compatible rinsing and barrier liquid in a closed system. All mechanical seals are tested for quality prior to delivery, ensuring complete reliability of WAB seals. In addition to the simple maintenance, the mechanical seal can be returned to the factory for inspection and repair and for WAB to replace the vital components. The refurbished seal is then subjected to the standard WAB final inspection. In this way, you have the maximum possible


benefits and achieve a significant reduction in maintenance costs.

Grinding container cooling

The uniquely designed cooling system is comprised of a flexible rubber strip in order to efficiently channel the water around the milling vessel and produce the best possible turbulent heat exchange. This design feature allows the inner cylinder to be removed and replaced without any difficulty, even after many years of service.



Shaft seal



Grinding container cooling

Contamination free? Sterile version? – No problem!

We tailor the machine to your needs

Contamination free dispersion and fine wet grinding of high value products, demand the highest possible process standards. To meet these high demands, high quality ceramic and no metallic parts are used to assure contamination free processing.





Non-metallic material selection

The **DYNO®-MILL KD** can be equipped with wearing parts in contact with the product that are made either from plastic or from industrial fine ceramics. The following materials may be used, according to the intended purpose of the mill along with the function and size of the components:

- Aluminium oxide
- Aluminium oxide reinforced with zirconium oxide
- Zirconium oxide stabilised with yttrium
- Silicon carbide
- Polyurethane
- Polyamide

Most mills, from the laboratory to production scale, can be supplied with ceramic or non-metallic wetted contact parts. Additionally, because of high quality and design standards, most mills can be simply retrofitted with ceramic or non metallic wetted contact parts.

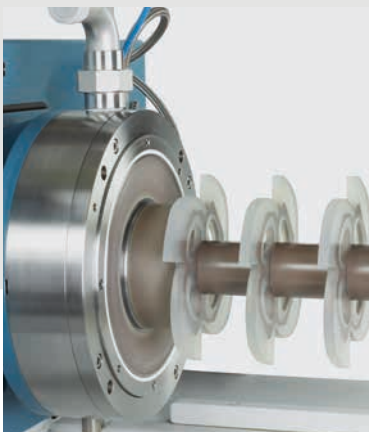

DYNO®-MILL KD in sterile version

For the cosmetics, pharmaceutical and biochemical industries, WAB is able to deliver the **DYNO®-MILL** in an all stainless steel finish and with specially adapted installations to suit customer needs. Below are some examples of the versions available to meet individual customer specifications:

- Machine housing in stainless steel according to GMP standard – external components polished and brushed with grain size 160
- Rinse liquid container with cooling coil and hose connectors in stainless steel
- Wearing components in contact with the product made from zirconium oxide
- Agitator discs in polyamide or zirconium oxide
- Product inlet and outlet with welded stubs and Tri-clamp connections
- Cooling jacket suitable for cooling/heating media from -15°C to 80°C
- Hygienic tubular PT 100 and pressure gauge
- Hermetically sealed machine housing with forced air ventilation
- Water-cooled main motor



Reproducibility and top quality – | the WAB control and validation concept

Comprehensive control package

From manually operated through semi-automated up to fully automated controls – the **DYNO®-MILL KD** can be supplied as an explosion-proof version in accordance with 94/4/EG (ATEX).



WAB VIEW control

In addition to clear and simple operation of the mill, the WAB VIEW control takes care of monitoring and recording of all process-relevant parameters. The programmable control is modular and can be upgraded:

- Data collection
- Process control by means of product temperature or energy input (kWh)
- Visualization systems with comprehensive formulation management
- External communication system via modem
- Attachment to a PC or control system is an integral part of the package



WAB CONTROL (IP 65)

The WAB CONTROL can be used not only for the operation of the mill but also the monitoring, capture and recording of all process-relevant parameters such as:

- Agitator shaft speed (rpm)
- Product outlet temperature (°C)
- Energy input (kWh)
- Attachment to a PC for fast and simple recording
- Torque measurement



GMP standard version – with WAB validation concept

The **DQ, IQ, OQ** qualification documents required for validation or the certificates for process-relevant machine components such as calibration and material certificates are available for all **DYNO®-MILL** types. On request, we will also conduct the **FactoryAcceptanceTests** here in the factory or the **SiteAcceptanceTests** together with you on your premises.



Your long-term benefit – | our service and support

Our reliability – your added value

We export our machines and equipment all over the world. They prove their capabilities over a long service life under the toughest possible operating conditions. This is the result of the high quality and functionality of our products and services. Through our worldwide network with subsidiaries and independent representatives, we ensure highly qualified advice and support even after the delivery of the machines. The shipment of spare parts within 24 hours from our own warehouse guarantees minimum machine downtimes and offers optimum customer benefits.

Spare parts supply – after sales service

To ensure swift and trouble-free delivery of spare parts, WAB operates a modern warehouse with dynamic stock level monitoring. Spare parts and wearing parts are also available for machines over 20 years old. Competent advice from trained and experienced personnel guarantees fast and dependable service all over the world.



Short delivery times are a challenge for us that we take up with professionalism and personal commitment.



Spare parts shipment within 24 hours from stock

Production

State-of-the-art, computer-based production machines are your guarantee of **DYNO®-MILL's** consistently superior quality.



Research and development

A world class team of engineers and technicians plan and develop new solutions and processes using state-of-the-art tools. Their work takes account of the latest scientific and engineering findings as well as the latest regulations and industry standards. The possible utilization of high-tech materials is part of the project work from the outset.



*Technical center with the latest **DYNO®-Mill** versions*

A technical centre with the necessary infrastructure is available for tests on behalf of individual customers and for trials of new developments and prototypes. State-of-the-art analytical facilities are used to evaluate the results. The process engineers provide customers with expert, in-depth advice either here in Muttensz or at the user's premises, while supporting our design department in working out custom solutions.



Analytical laboratory featuring the latest high-tech equipment

Scaling-up from the lab to production

The complete and well-thought-out **DYNO®-MILL KD** program extends from the **MULTI LAB** for research and development tasks, up to the **DYNO®-MILL KD 600** for large-scale production. Due to the design, scalability from laboratory size to large-scale production mills is guaranteed.

Thanks to the uniform geometries of the milling system throughout the **DYNO®-MILL KD** program, highly reproducible grinding and milling results can be obtained on all **DYNO®-MILL** type **KD** mills.

**DYNO®-MILL
MULTI LAB**



**DYNO®-MILL
KD 600**




An overview of the DYNO®-MILL KD series


TYPE	GRINDING BEAD SEPARATION		GRINDING CONTAINER VOLUME l	CAPACITY RANGE l/h	MILL DRIVE kW	COOLING WATER CONSUMPTION l/h	WEIGHT kg	DIMENSIONS L/W/H mm
	GAP	SCREEN						
MULTI LAB	x		0.15 – 1.4	1 – 50	3.3 – 4.6	250 – 400	95 – 125	680 x 740 x 580
KD 6 (6)	x		6	20 – 150	10 – 15	800 – 1500	800	1300 x 1025 x 1385
KD 6 (8)	x		8	20 – 200	12.5 – 17.5	800 – 1500	850	1412 x 1025 x 1385
KD 20 B	x		16,5	70 – 500	17.5 – 24	800 – 1500	700	1500 x 882 x 1515
KD 20 BS		x	18	70 – 500	17.5 – 24	800 – 1500	750	1515 x 882 x 1515
KD 25	x		25	100 – 700	24 – 30	800 – 1500	850	1740 x 882 x 1515
KD 25 S		x	26	100 – 700	24 – 30	800 – 1500	850	1754 x 882 x 1515
KD 45 D	x		46	180 – 1000	36 – 45	1800 – 2500	1600	2030 x 1210 x 1780
KD 45 DS		x	49	180 – 1000	36 – 45	1800 – 2500	1600	2060 x 1210 x 1780
KD 60	x		60	200 – 1300	36 – 58	1800 – 2500	1800	2205 x 1210 x 1780
KD 60 S		x	62	200 – 1300	36 – 58	1800 – 2500	1800	2235 x 1210 x 1780
KD 120 A		x	128	300 – 2000	55 – 75	2000 – 4000	2500	2900 x 1360 x 2130
KD 190 A		x	196	500 – 3000	55 – 84	2000 – 4000	3000	3100 x 1360 x 2160
KD 280 A		x	296	800 – 5000	70 – 110	2000 – 5000	3200	3270 x 1360 x 2130
KD 600		x	612	1000 – 8000	160 – 250	2000 – 6000	8000	3900 x 2495 x 2018

Changes in design reserved. The performance data quoted is intended solely as a guide and depends on the product to be processed.

DYNO®-MILL RESEARCH LAB – specially developed for the R&D department. For processing very small product batches of >100 ml in single pass or circulation modes! Ask for our product brochure or visit our website: www.wab.ch

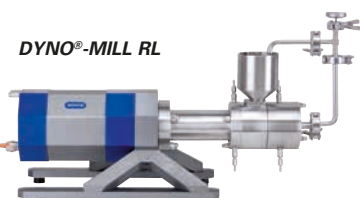

Top performance for your product | The best in class



- for aqueous,
- solvent-based
- and contamination sensitive products

in laboratories and production areas
of countless sectors of the industry

- Paints and varnishes
- Printing inks
- Coatings
- Pigments and dyes
- Automobile coatings
- Food industry

- Filling
- Agrochemicals
- Paper industry
- Life sciences
- Biotechnology

Test the performance of the future

Experience the future live in our technical center. Test the **DYNO®-MILL KD** and see its amazing performance potential for yourself. We will be pleased to arrange an appointment for you and provide assistance with any process engineering questions.

WAB global: our service and sales network

Our worldwide network of more than 40 sales and service points is available to our customers for expert advice and efficient support. It ensures always a quick response and minimum down times. In addition to the comprehensive stock at our head office, our subsidiaries and other sales and service points maintain well-stocked spare parts stores.

WAB-GROUP

WAB

Willy A. Bachofen AG

Junkermattstrasse 11
P.O. Box 944
4132 Muttenz 1
Switzerland
Tel. +41 61 6867 100
wab@wab-group.com
www.wab-group.com

WAB Machinery (Shenzhen) Co., Ltd.

Unit 102, Floor 1, Plant Building 1
Everbrite Technology Park, Minqing Road
Longhua District, Shenzhen – 518109
China
Tel. +86 755 2813 5108
wab-cn@wab-group.com
www.wab-group.com

WAB Machinery (Shenzhen) Co., Ltd.

Room 1710, Kerry Everbright City, Phase 1
No. 218 Tianmu Road West
Jing'an District, Shanghai – 200070
China
Tel. +86 21 6380 6481
wab-cn@wab-group.com
www.wab-group.com

WAB India Pvt. Ltd.

Plot No. D 36/3B
T.T.C. Industrial Area, Turbhe
Navi Mumbai – 400 705
India
Tel. +91 22 613 171 00
wab-in@wab-group.com
www.wab-group.com

WAB US Corp.

3 Pearl Court, Suite E
Allendale, NJ 07401
USA
Tel. +1 973 873 9155
wab-us@wab-group.com
www.wab-group.com

Willy A. Bachofen GmbH

Liebigstrasse 16
61130 Nidderau-Heldenbergen
Germany
Tel. +49 6187 9394 0
wab-de@wab-group.com
www.wab-group.com

Willy A. Bachofen S.à.r.l.

3 rue Paul Henri Spaak
68390 Sausheim
France
Tel. +33 389 31 17 00
wab-fr@wab-group.com
www.wab-group.com

WAB Israel Corp Ltd

17th floor, B.S.R 2 Building
1 Ben Gurion Str., Bnei Brak 5120149
Israel
Tel. +972 3 6142303
wab-il@wab-group.com
www.wab-group.com